

37NE527

Excellent printing quality of barcode little characters and logos
High printing speed and printing performance. Good resistance to smudge.

INK FEATURES

Ideal for printing on flexible packaging, guarantees a good resistance to mechanical smudge and scratch.


It offers high printing quality even at high speed.

Ink	Wax-Resin based
Back-coating	Silicon based
Ribbon thickness	< 7 µm
PET film thickness	4 µm
Length	1200m
Width	30mm 55mm


APPLICATION FIELDS




PRINTER SPEED




PRINT RESISTANCE

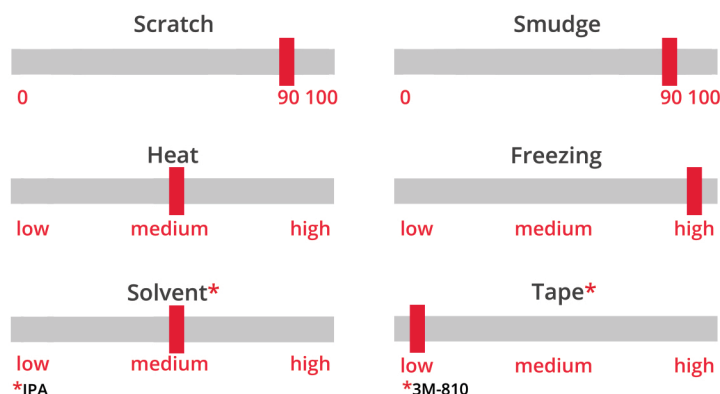

PRINT QUALITY

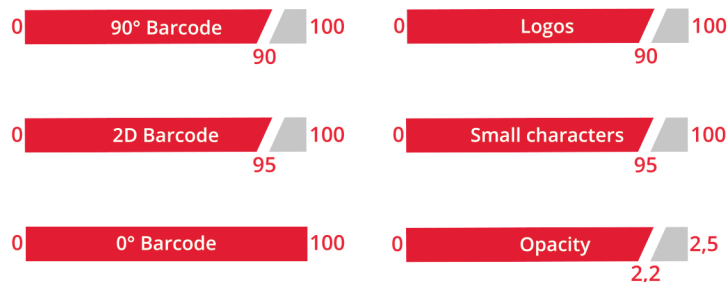

RIBBONS PORTFOLIO

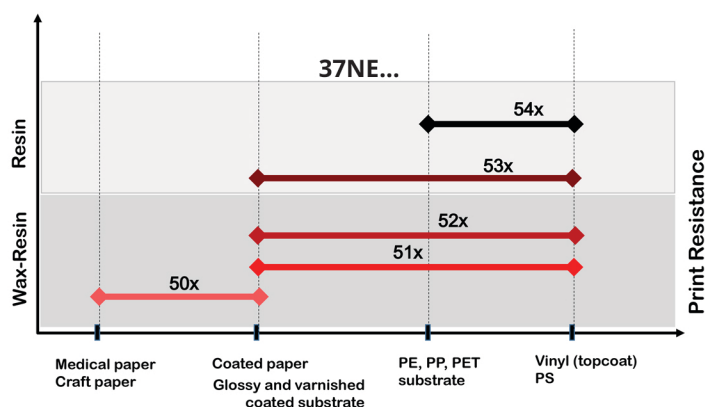

PRODUCT COMPLIANCE

REACH/SVHC Free:1907/2006/EC

RoHSII 2011/65/EU

California Proposition 65 (USA)

Food contact: 1935/2004/EC (ISEGA)

FDA (USA)

Halogen Free

Conflict mineral(EU)

SHELF LIFE

12 Months recommended

20 - 80% Humidity Rate tra 5 - 35°C (40-95°F)