

37NE547

Resin ribbon suitable for printing on resistant plastic surfaces.
Excellent mechanical and thermal resistance.
High printing quality and excellent characters definition.

INK FEATURES


Resin ribbon recommended for high temperature and mechanical resistance.
This ribbon has been developed to achieve high resolution on barcodes and small characters printing.
The anti-static treatment increases the printhead life.

Ink	Resin based
Back-coating	Silicon based
Ribbon thickness	< 9 µm
PET film thickness	4,5 µm
Length	1000m
Width	30mm 55mm


APPLICATION FIELDS




PRINTER SPEED

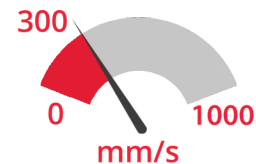


PRINT RESISTANCE

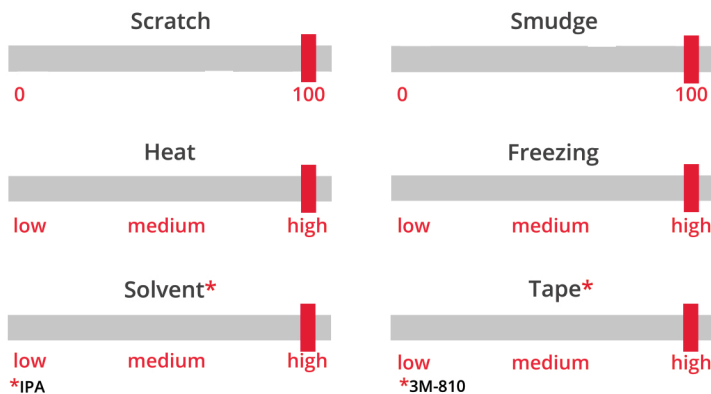

PRINT QUALITY

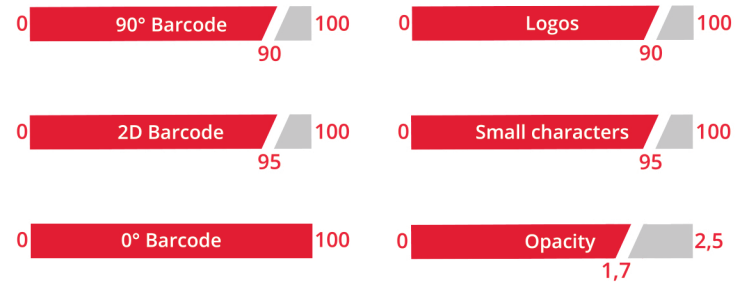

RIBBONS PORTFOLIO

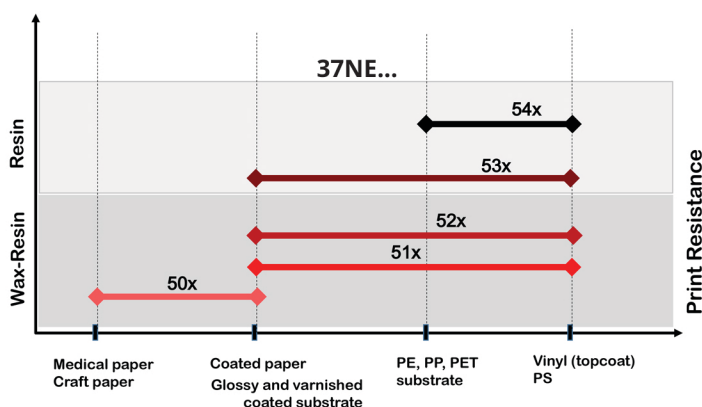

PRODUCT COMPLIANCE

REACH/SVHC Free:1907/2006/EC

RoHSII 2011/65/EU

California Proposition 65 (USA)

Food contact: 1935/2004/EC (ISEGA)

FDA (USA)

Halogen Free

Conflict mineral(EU)

SHELF LIFE

12 Months recommended

20 - 80% Humidity Rate tra 5 - 35°C (40-95°F)